


G-2130E



- Working Load Limit and Grade 6 permanently shown on every shackle.
- Forged, Quenched & Tempered, with alloy bolts.
- Hot-dip galvanized (G) or self colored (S). 85, 120, and 150-metric ton shackles are all hot-dip galvanized bows and the bolts are Dimetcoted® and painted red.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit (25t - 55t).
- Approved for use at -40° F (-40° C) to 400° F (204° C).
- Meets or exceeds all requirements of ASME B30.26.
- Shackles 85 metric tons and larger are individually proof tested to 2.0 times the working load limit.
- Type Approval certification in accordance with ABS Marine Vessel Rules, ABS Mobile Offshore Units, and ABS Guide for the Certification of Lifting Appliances available. Certificates available when requested at time of order and may include additional charges.
- 3.1 Certification as standard available for charpy and statistical proof test for 25t EN13889.
- All other 2130 shackles can meet charpy requirements of 31 ft-lb (42 Joules) avg at -4° F (-20° C) when requested at time of order.
- Meets the performance requirements of Federal Specification RR-C-271, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Meets all performance and design requirements of ISO 2415.
- Look for the Red Pin®... the mark of genuine Crosby quality.

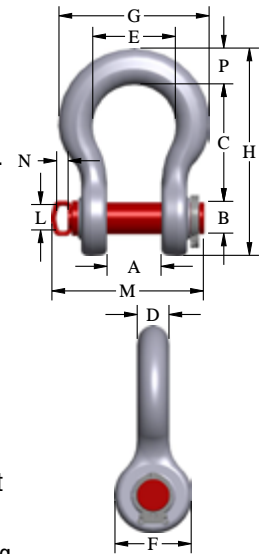

G-2130E Easy-Loc® Shackles

Nominal Shackle Size (in)	Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)														Replacement EZ-Loc Collar Stock No.	Replacement Bolt Kit Stock No.
				A	Tol. A±	B	C	Tol. C±	D	E	F	G	H	L	M	N	P		
1-3/4	25	1021545	34	2.88	.13	2.03	7.00	.25	1.84	5.00	4.19	8.84	12.34	-	9.68	-	2.25	1025791	1087446
2	35	1021554	49	3.25	.13	2.31	7.75	.25	2.08	5.75	4.81	10.15	13.68	-	10.81	-	2.40	1025791	1087455
2-1/2	55	1021563	100	4.12	.25	2.81	10.50	.25	2.71	7.24	5.81	12.75	17.90	-	13.52	-	3.12	1025800	1087464
3	85	1021572	156	5.00	.25	3.30	13.00	.25	3.12	7.88	6.50	14.63	21.50	-	15.13	-	3.63	1025819	1087473
3-1/2	120	1021581	256	5.25	.25	3.76	14.62	.25	3.63	9.02	8.00	17.00	24.88	4.00	19.95	1.80	4.38	1025810	1087482
4	150	1021590	306	5.50	.25	4.26	14.50	.25	4.00	10.00	9.00	18.00	25.68	4.00	20.58	1.80	4.56	1025828	1087491

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit. For Working Load Limit reduction due to side loading applications, see Warnings & Applications.

