


G-2130E



- Working Load Limit and Grade 6 permanently shown on every shackle.
- Forged, Quenched & Tempered, with alloy bolts.
- Hot-dip galvanized (G) or self colored (S). 85, 120, and 150-metric ton shackles are all hot-dip galvanized bows and the bolts are Dimetcoted® and painted red.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit (25t - 55t).
- Approved for use at -40° C (-40° F) to 204° C (400° F).
- Meets or exceeds all requirements of ASME B30.26.
- Shackles 85 metric tons and larger are individually proof tested to 2.0 times the working load limit.
- Type Approval certification in accordance with ABS Marine Vessel Rules, ABS Mobile Offshore Units, and ABS Guide for the Certification of Lifting Appliances available. Certificates available when requested at time of order and may include additional charges.
- 3.1 Certification as standard available for charpy and statistical proof test for 25t EN13889.
- All other 2130 shackles can meet charpy requirements of 42 Joules (31 ft-lb) avg at -20° C (-4° F) when requested at time of order.
- Meets the performance requirements of Federal Specification RR-C-271, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Meets all performance and design requirements of ISO 2415.
- Look for the Red Pin®... the mark of genuine Crosby quality.

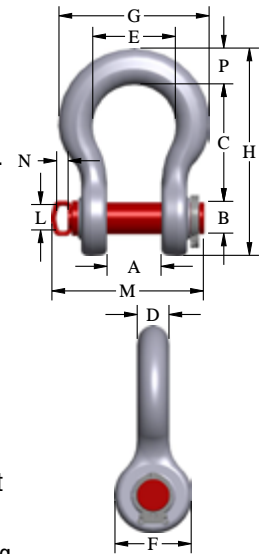

G-2130E Easy-Loc® Shackles

Nominal Shackle Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)														Replacement EZ-Loc Collar Stock No.	Replacement Bolt Kit Stock No.
				A	Tol. A±	B	C	Tol. C±	D	E	F	G	H	L	M	N	P		
1-3/4	25	1021545	15	73	3.3	52	178	6.4	47	127	106	225	313	-	246	-	7	1025791	1087446
2	35	1021554	22	83	3.3	59	197	6.4	53	146	122	258	347	-	275	-	61	1025791	1087455
2-1/2	55	1021563	45	105	6.4	71	167	6.4	69	184	148	324	455	-	343	-	79	1025800	1087464
3	85	1021572	71	127	6.4	84	330	6.4	79	200	165	372	546	-	384	-	92	1025819	1087473
3-1/2	120	1021581	116	133	6.4	96	371	6.4	92	229	203	432	632	102	507	46	111	1025810	1087482
4	150	1021590	139	140	6.4	108	368	6.4	102	254	229	457	652	102	523	46	116	1025828	1087491

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit. For Working Load Limit reduction due to side loading applications, see Warnings & Applications.

