


Safety Hook BK

The "original" safety hook with eye connector.

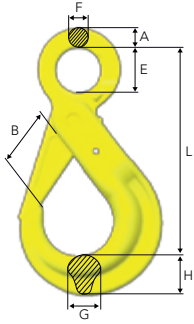


Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			A	L	B	E	F	G	H	
Z101108	BK-6-10	3,306	.47	4.29	1.14	.87	.39	.59	.83	1.10
Z101097	BK-7/8-10	5,700	.55	5.43	1.46	1.10	.43	.67	1.02	1.98
Z101024	BK-10-10	8,800	.63	6.61	1.77	1.34	.51	.83	1.22	3.31
Z101032	BK-13-10	15,000	.79	8.15	2.17	1.73	.63	1.18	1.57	6.61
Z101040	BK-16-10	22,600	1.02	10.00	2.44	2.20	.79	1.46	1.97	12.13
Z101089	BK-18/20-10	35,300	1.18	11.38	2.68	2.36	.87	1.73	2.52	19.84
Z101325	BK-22-10	44,080	1.26	12.60	3.15	2.76	.94	1.97	2.52	24.91
Z101326	BK-26-10	60,169	1.38	13.46	3.94	3.15	.98	2.13	2.68	36.38

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M. For larger sizes, see Classic Grade 8.

Safety Hook OBK

Safety hook with eye connector and grip latch..




Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			A	L	B	E	F	G	H	
Z101048	OBK-6-10	3,306	.47	4.06	1.02	.87	.35	.59	.67	.88
Z101143	OBK-7/8-10	5,700	.55	5.47	1.46	1.10	.39	.79	.87	1.76
Z101145	OBK-10-10	8,800	.63	6.69	1.85	1.34	.51	.87	1.14	2.87
Z101147	OBK-13-10	15,000	.83	8.11	2.09	1.73	.59	1.14	1.50	5.73
Z101141	OBK-16-10	22,600	1.02	9.88	2.68	2.20	.75	1.14	1.77	9.70
Z101240	OBK-18/20-10	35,300	1.10	11.54	2.91	2.36	.87	1.73	2.20	16.09

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M. For larger sizes see Classic Grade 8(OBK-22-8).

Safety Hook BKD

Double latch BK-hook with recessed trigger. Should the first hook latch accidentally open, either through direct impact or excessive wear on the trigger, the extra latch is there to retain the load safely. The secondary latch is designed to be easily operated and will not cause inconvenience for the operator.

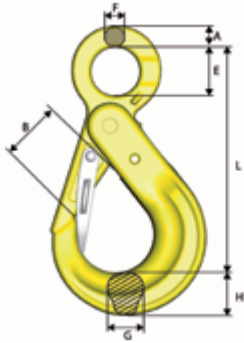


Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			A	L	B	E	F	G	H	
Z101154	BKD-13-10	15,000	.79	8.15	1.73	1.73	.63	1.18	1.57	7.05
Z101155	BKD-16-10	22,600	1.02	10.00	1.89	2.20	.79	1.46	1.97	12.79
Z101156	BKD-18/20-10	35,300	1.18	11.38	2.24	2.36	.87	1.73	2.44	20.06
Z101373	BKD-26-10	60,169	1.38	13.58	2.83	3.15	.98	2.13	2.68	37.04

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

Shank Safety Hook BKT

Safety hook with shank ready for customized machines.

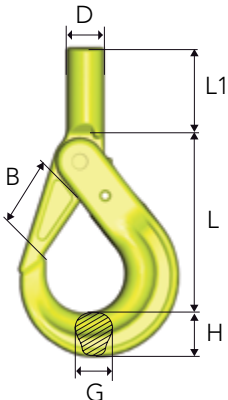

Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	L1	D	d min	G	H	
Z1011120	BKT-6-10	3,306	3.54	1.14	1.42	.79	.43	.59	.83	1.10
Z1011020	BKT-7/8-10	5,700	4.37	1.46	1.85	.94	.51	.67	1.02	1.98
Z1010690	BKT-10-10	8,800	5.24	1.77	2.01	1.14	.63	.83	1.22	3.53
Z1010710	BKT-13-10	15,000	6.30	2.17	3.03	1.34	.79	1.18	1.54	6.61

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M. d min = the smallest permitted shank dimension after machining. Note! After machining of the shank, proof loading must be carried out.