


Radiolink Plus (RLP)



- Capable of weighing and dynamic load monitoring in capacities from 1t to 300t.
- Constructed of lightweight, aerospace grade aluminum.
- Environmentally sealed to IP67 or NEMA6.
- Frequency: Proprietary 2.4 GHz wireless.
- Update rate of 3Hz and can be easily configured to run at industry-leading speeds of up to 200Hz.
- Remote on/off from handheld display or software.
- ATEX Zones 0, 1 & 2 available.
- Design validated by FEA.
- 2-year warranty.
- DNV Type Approval.
- Complies with ASME B30.26.
- Bluetooth option is available and is supplied with a free HHP app for iOS and Android.
- Battery Type: Handheld 2 x AA / Loadcell 4 x AA.
- Battery Life: Handheld - 40 hours / Loadcell 1,200 hours continuous (Loadcell 500 hours if Bluetooth).
- Display Type: 240 x 128 pixel Multi-line dot matrix with backlight.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- System Range (max): 3,280 ft (328 ft if Bluetooth), (1,640 ft if ATEX/IECEx).

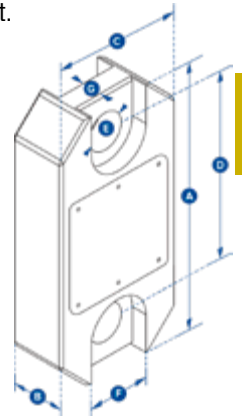

2



Crosby Straightpoint Radiolink Plus (RLP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789084	RLP1T	2200	1	10.8	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789089	RLP2T5	5500	2	10.8	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789094	RLP6T5	14300	2	12.5	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789082	RLP12T	26000	5	15.7	7:1	12.01	1.85	4.45	7.60	1.87	—	—	G2130	1019597
2789088	RLP25T	55000	10	19.0	5:1	13.39	2.36	4.53	8.46	2.17	—	—	G2130	1019659
2789091	RLP35T	77000	10	30.9	5:1	15.47	2.95	4.96	8.86	2.36	—	—	G2130	1019677
2789093	RLP55T	120000	20	44.0	5:1	16.69	2.95	7.09	9.06	2.99	—	—	G2140	1021156
2789095	RLP75T	165000	20	67.8	5:1	18.50	2.95	7.95	10.24	2.99	—	—	G2140	1021174
2789081	RLP100T	220000	100	122.5	5:1	23.94	3.90	10.04	12.60	4.29	—	—	G2140	1021192
2789083	RLP150T	330000	100	158.8	4:1	26.38	3.90	11.93	14.17	4.29	—	—	G2140	1021218
2789085	RLP200T	440000	200	231.6	5:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021234
2789087	RLP250T	550000	200	231.6	4:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021243
2789090	RLP300T	660000	200	349.2	5:1	31.73	5.91	16.77	13.78	6.30	—	—	G2140	1021252