


Loadlink Plus



- Capacity from 2,200 lb to 660,000 lb.
- Unmatched weight-to-strength ratio.
- 30% lighter than competing dynamometers with the same safety rating.
- Large high resolution 1 in LCD display.
- Features full function push button controls for tare, choice of units (lbs, kg, kN, and metric tons), peak hold, preset tare, audible set-point alarm, and an overload counter.
- The highest standard resolution of any digital dynamometer on the market today (5,000+ divisions).
- 100Hz peak hold.
- 2-year warranty.
- DNV Type Approval.
- Design validated by FEA.
- Complies with ASME B30.26.
- Battery Type: 9v PP3 Alkaline.
- Battery Life: 80 hours continuous.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Protection: IP65 / NEMA4X.

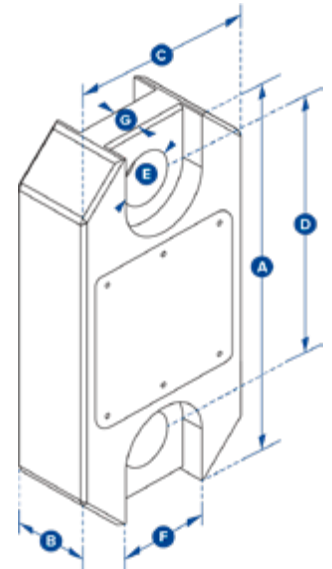

Crosby Straightpoint Loadlink Plus (LLP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789042	LLP1T	2200	1	3.3	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789046	LLP2T5	5500	2	3.3	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789050	LLP6T5	14300	2	5.3	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789040	LLP12T	26000	5	8.2	7:1	12.01	1.85	4.45	7.60	1.87	2.60	1.26	G2130	1019597
2789045	LLP25T	55000	10	11	5:1	13.39	2.36	4.53	8.46	2.17	2.60	1.26	G2130	1019659
2789048	LLP35T	77000	10	19	5:1	15.47	2.95	4.96	8.86	2.36	2.60	1.26	G2130	1019677
2789049	LLP55T	120000	20	28.7	5:1	16.69	2.95	7.09	9.06	2.99	2.60	1.26	G2140	1021156
2789051	LLP75T	165000	20	35.3	5:1	18.50	2.95	7.95	10.24	2.99	2.60	1.26	G2140	1021174
2789039	LLP100T	220000	100	75	5:1	23.94	3.90	10.04	12.60	4.29	2.60	1.26	G2140	1021192
2789041	LLP150T	330000	100	101.4	4:1	26.38	3.90	11.93	14.17	4.29	2.60	1.26	G2140	1021218
2789043	LLP200T	440000	200	180.8	5:1	27.56	5.67	13.78	13.78	5.71	2.60	1.26	G2140	1021234
2789044	LLP250T	550000	200	180.8	4:1	27.56	5.67	13.78	13.78	5.71	2.60	1.26	G2140	1021243
2789047	LLP300T	660000	200	260	5:1	31.73	5.91	16.77	13.78	6.30	2.60	1.26	G2140	1021252