


Compatible Cabled Devices



Cabled Load Shackle (SLB)

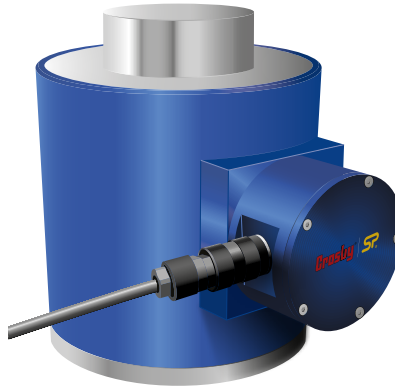

Compression Loadcell (NI)



Wirelink Plus (WLP)

All include 10m of cable as standard - longer lengths available*.

Handheld Device Compatibility

Most popular
Handheld Plus
(HHP - 2789030)



Analog Output

(installed inside loadcell housing)

- 2789220 - ICA1-3 wire 0-10 V
- 2789221 - ICA2-3 wire 0-5 V
- 2789222 - ICA3-4 wire ± 10 V
- 2789223 - ICA4-3 wire 4-20 mA
- 2789224 - ICA5-2 wire 4-20 mA

Stock Output

- mV/V (no display)

RS-Type Digital Outputs

- 2789791 - RS-485 ASCII
- 2789792 - RS-485 MOD-BUS RTU

*Additional cable lengths

- 2789229 20m 6 way HHP connecting cable
- 2789230 30m 6 way HHP connecting cable
- 2789231 50m 6 way HHP connecting cable

Note: Output option and cable length needs to be selected at time of order.