
TU-481



- Wide range of sizes available:
  - 30 and 60 short Tons (27 and 54 metric tons) capacity
  - 1" to 2-1/4" (25mm to 60mm) wire rope diameter
  - 16" to 24" (406mm to 610mm) sheave diameter
  - Larger capacity blocks available
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Marked in short tons unless metric tag requested at time of order.

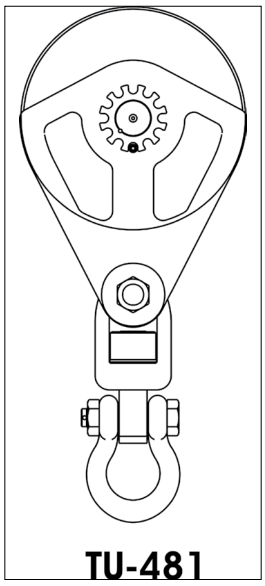

APPLICATION AND WARNING INFORMATION
SECTION 17

TU-481 High Capacity Snatch Blocks for Tilt-Up Wall Construction With Swivel Shackle

Working Load Limit (T)	Sheave Diameter (in)	Wire Rope Diameter (in)	With Swivel Shackle	
			TU-481 Stock No.	TU-481 Weight Each (lb)
30	16	1 - 1-1/4	2108327	221
30	16	1-1/4 - 1-1/2	2108351	229
30	20	1 - 1-1/4	2108387	252
30	20	1-1/4 - 1-1/2	2108411	271
60	18	1 - 1-1/4	2108453	367
60	18	1-1/4 - 1-1/2	2108483	380
60	24	1 - 1-1/4	2108528	393
60	24	1-1/4 - 1-1/2	2108558	438
60	24	1-1/2 - 1-3/4	2108588	435
60	24	1-3/4 - 2	2108618	481
60	24	2 - 2-1/4	2108633	488

4:1 Design Factor.
Contact our Block Hotline 800-772-1555 or visit thecrosbygroup.com/engineeredsolutions for more information.

© 2027 CMCO. All Rights Reserved.