
TU-481



- Wide range of sizes available:
  - 27 and 54 metric tons (30 and 60 short Tons) capacity
  - 25mm to 60mm (1" to 2-1/4") wire rope diameter
  - 406mm to 610mm (16" to 24") sheave diameter
  - Larger capacity blocks available
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Marked in short tons unless metric tag requested at time of order.

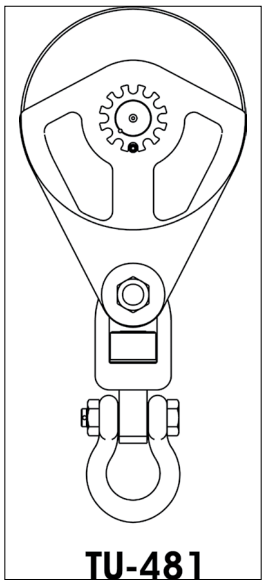

APPLICATION AND WARNING INFORMATION
SECTION 17

TU-481 High Capacity Snatch Blocks for Tilt-Up Wall Construction With Swivel Shackle

Working Load Limit (t)	Sheave Diameter (mm)	Wire Rope Diameter (mm)	With Swivel Shackle	
			TU-481 Stock No.	TU-481 Weight Each (kg)
27	406	25-32	2108327	100
27	406	32-38	2108351	104
27	508	25-32	2108387	114
54	508	32-38	2108411	123
54	457	25-32	2108453	166
54	457	32-38	2108483	172
54	610	25-32	2108528	178
54	610	32-38	2108558	199
54	610	38-44	2108588	197
54	610	44-51	2108618	218
54	610	51-57	2108633	221

4:1 Design Factor.
Contact our Block Hotline 800-772-1555 or visit thecrosbygroup.com/engineeredsolutions for more information.

© 2027 CMCO. All Rights Reserved.