




Gunnebo Industries **TURNBUCKLE**

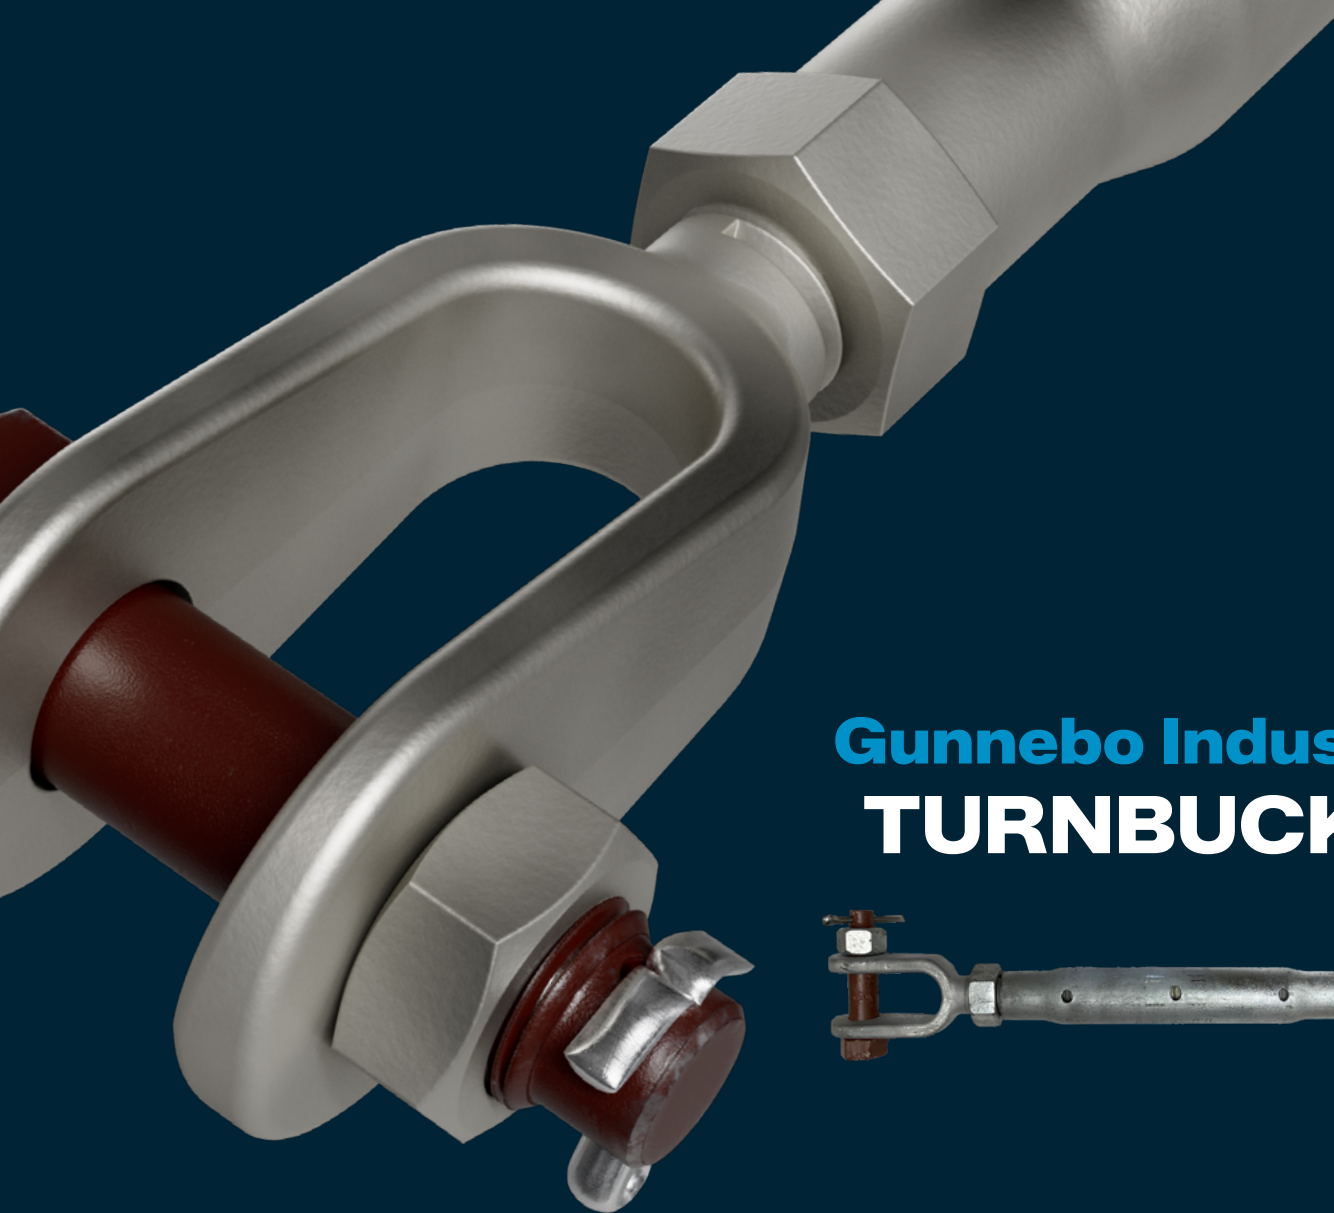

**Engineered for strength, reliability
and to withstand harsh environments**

- ▶ Safety bolts in end-terminals
- ▶ Adjustable end connections are secured against unintended disengagement in accordance with NORSOK R-002 requirements
- ▶ End connections and bodies are quenched and tempered for enhanced strength and durability
- ▶ End connections manufactured from forged alloy steel
- ▶ Hot-dip galvanized for corrosion resistance
- ▶ Tolerance: $\pm 5\%$
- ▶ Working load in accordance with US Federal Specification FF-T-791B
- ▶ Temperature range: -40°C to $+200^{\circ}\text{C}$ (-40°F to $+392^{\circ}\text{F}$)

Country of origin




Norway



GUNNEBO[®]
Industries




Gunnebo Industries Turnbuckle

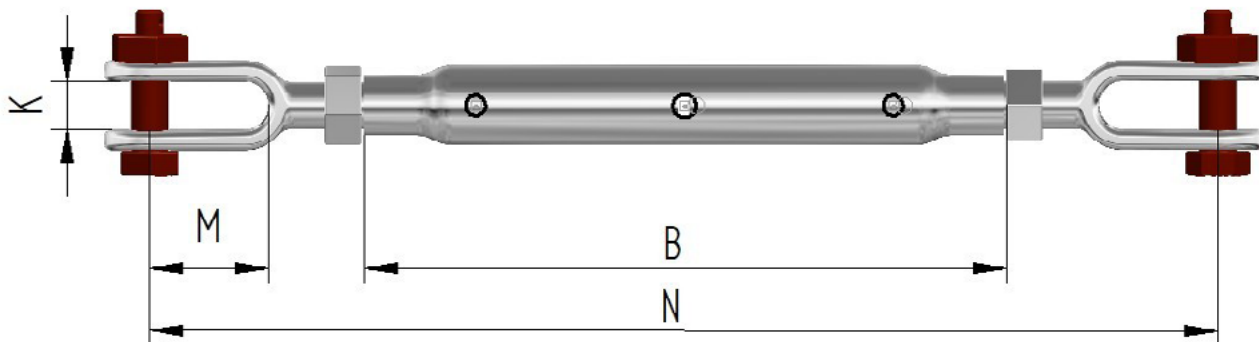

Alloy Steel Rigging Screw, No 801 - SUPER SAFE

Stock no.	Thread/dim.	WLL (t)	Take up	B	N	K	L	M	F	G	H	Weight (kg)
A801520	M 20	2.5	165	270	455	20	16	50	13	21	45	2.3
A801524	M 24	5.0	223	340	570	28	22	65	19	28	56	4.6
A801532	1-1/4"	7.0	214	370	680	38	28	85	22	35	70	8.0
A801538	1-1/2"	10.0	240	400	790	45	32	100	25	40	78	14.0
A801545	1-3/4"	13.0	310	500	870	50	39	105	30	45	90	24.0
A801550	2"	17.0	380	600	1030	58	45	120	35	45	100	38.0

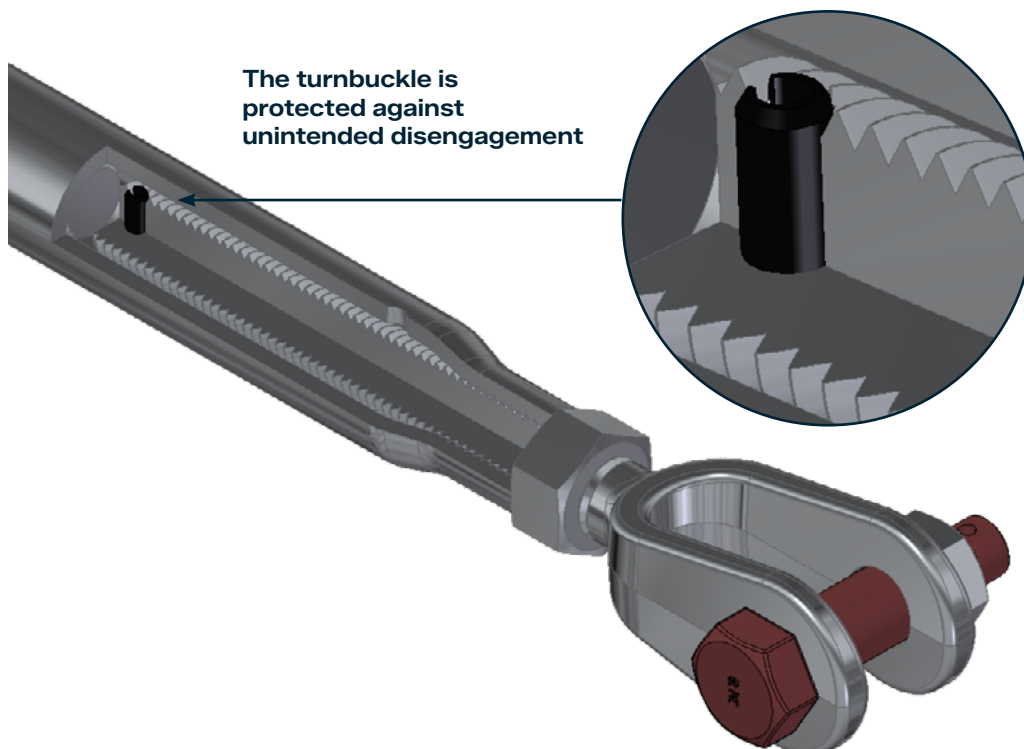

Identification markings

Gunnebo Industries Lifting

Batch number

Working load limit

European conformity

