

PL
Latch Kits




LATCH ORDERING INSTRUCTIONS

Specify PL, PL-N or PL-O latch kit stock number from charts below.

Specify capacity of hook to which latch will be assembled.

Specify hook material (carbon or alloy).

- Hot-dip galvanized.
- Heavy duty latch with easy operating features.
- Flapper lever indicates locked or unlocked position.
- Assembly instructions included with each latch.
- For additional dimensional data on eye, shank or swivel hooks, see Warnings & Applications.
- Meets the intent of OSHA Rule 1926.1431(g) and 1926.1501(g) (when secured with the bolt, nut and pin) for lifting personnel.

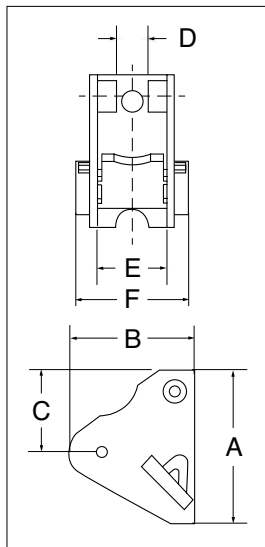

APPLICATION AND WARNING INFORMATION
SECTION 17

PL LATCH KITS

Hook Size (t)		Hook ID Code	Stock No.	Weight Each (kg)	Dimensions (mm)						Replacement Spring Stock No.
Carbon	Alloy				A	B	C	D	E	F	
3	4-1/2	I	1093711	.24	68.3	60.7	52.6	16.0	28.7	49.5	-
5	7	J	1093712	.30	76.0	63.2	51.0	16.0	35.1	55.9	-
7-1/2	11	K	1093713	.45	92.0	62.5	60.5	16.0	41.4	63.2	-
10	15	L	1093714	.57	102	83.1	68.5	16.0	47.8	82.6	-
15	22	N	1093715	1.34	135	106	74.0	21.3	60.5	88.6	-
20	30	O	1093716	1.84	152	115	83.3	26.9	84.1	119	-
25	37	P	1093717	3.91	178	174	126	57.0	60.5	155	-
30	45	S	1093718	4.54	171	183	100	57.0	121	162	-
40	60	T	1093719	6.49	203	202	108	88.0	151	196	-
50	75	U	1093720	12.2	251	213	149	86.0	165	226	32468
-	100-150	W - X	1093721	15.1	276	276	165	86.0	200	254	32468
-	200	Y	1093723	20.4	302	284	162	86.0	222	286	32468
-	300	Z	1093724	24.9	318	315	201	86.0	254	311	32468

PL-N/O
Latch Kits




LATCH ORDERING INSTRUCTIONS

Specify PL, PL-N or PL-O latch kit stock number from charts below.

Specify capacity of hook to which latch will be assembled.

Specify hook material (carbon or alloy).

- Heavy duty latch with easy operating features.
- PL-N designed for Crosby 319N & 320N style hooks, PL-O designed for Crosby 319 & 320 old style hooks.
- Flapper lever indicates locked or unlocked position.
- Assembly instructions included with each latch.
- For additional dimensional data on eye, shank or swivel hooks refer to the specific product page in this section.
- Meets the intent of OSHA Rule 1926.1431(g) and 1926.1501(g) (when secured with the supplied toggle pin) for lifting personnel.

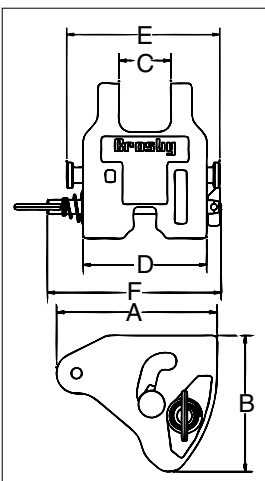

APPLICATION AND WARNING INFORMATION
SECTION 17

PL-N/O LATCH KITS

Hook Size (t)		Hook ID Code	PL-N Latch Kit Stock No.	PL-O Latch Kit Stock No.	Weight Each (kg)	Dimensions (mm)					
Carbon	Alloy					A	B	C	D	E	F
3	4.5 / 5 *	I	1092000	1091900	.36	60.9	51.0	21.1	54.1	68.8	87.4
5	7	J	1092001	1091901	.58	74.7	63.5	25.4	64.0	81.0	97.3
7-1/2	11	K	1092002	1091902	.90	92.2	76.7	30.2	69.9	87.4	111
10	15	L	1092003	1091903	1.27	102	86.1	34.0	81.0	102	114
15	22	N	1092004	1091904	2.22	132	110	40.9	98.0	122	130

*"N" style hooks are rated at 5 metric tons.