


Bolt On Line Tension Meter (BOLT)

2

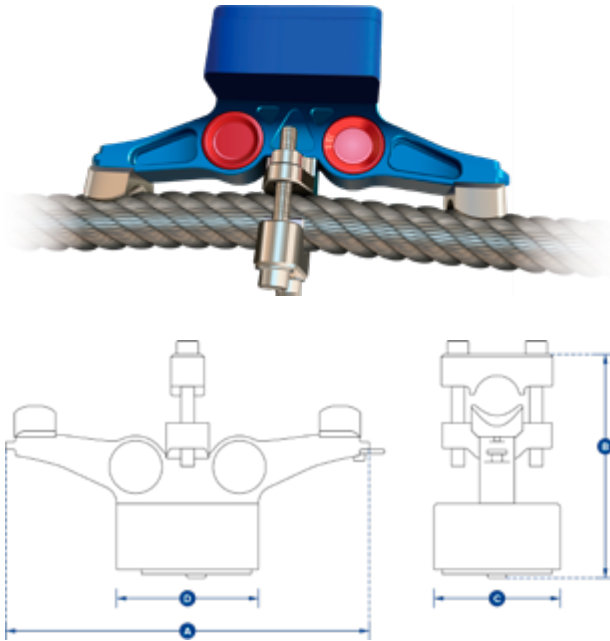

- Constructed from aerospace-grade aluminum.
- Designed to be mounted in a permanent position on wire rope or cable to accurately monitor measurements of tension up to 20,000 lb and up to 1.25in diameter.
- Proprietary 2.4 GHz wireless.
- Leading wireless range of 3,280 ft when connected to SW-HHP, enabling you to read up to four loadcells simultaneously.
- Unlimited range when connected to BaseStation to monitor remotely.
- Will provide reduced site visits, improve decision making and safely monitor line tensions from any distance from anywhere in the world.
- Unrivaled battery life of 1,200 hrs.
- Multiple drop tested from 10 feet.
- Internal antenna.
- Remote on/off from handheld display or software.
- Units: kilograms, pounds, metric tons and kilonewtons.
- Battery Type: 4 x 'AA' cell batteries.
- Operating Temperature: 14°F to +122°F.
- Protection: IP67 / NEMA6.
- Accuracy: Typically 3-5%.

Crosby Straightpoint Bolt On Line Tension Meter (BOLT)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Rope Diameter (in)		Weight (lb)	Dimensions (in)		
				Min	Max		A	B	C
2789573	BOLT10T	22,000	20	5/8	1 1/4	4.6	10.20	6.26	3.50



Crosby Straightpoint Training Videos

- How to pair a loadcell (and multiple loadcells) to a handheld
- How to know the correct number of compression cells required
- How to use the backlight function on a handheld
- How to get accurate loadcell readings at various distances
- Snatch block & loadcell demonstration
- COLT calibration verification tool installation demo
- Plus many more...

Watch now at kitocrosby.com/spvideos