


Stainless Steel Shackle No 735 Dee shackle with safety bolt

Material: AISI 316
Finish: Highly polished
Design Factor: 6:1
Documentation: Test certificate and traceable 3.1 certificate supplied upon request.

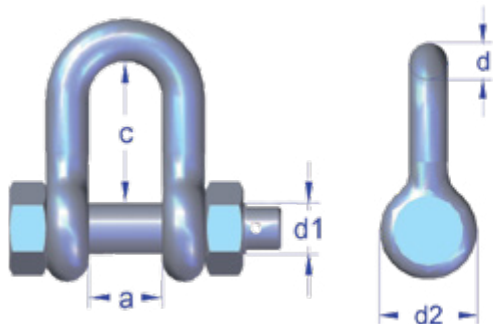


Stock No.	WLL (t) 6:1	Pin d1 (in)	Nominal Size d (in)	Inner Width a (in)	Inner Length c (in)	Eye Outer d2 (in)	Weight (lb)
A073510	0.6	0.39	0.39	0.78	1.57	0.78	0.44
A073512	0.9	0.47	0.47	1.02	1.96	0.94	0.66
A073516	1.5	0.62	0.51	0.94	2.04	1.29	0.88
A073520	2.5	0.74	0.62	1.10	2.55	1.57	1.54
A073522	3.0	0.86	0.74	1.22	2.36	1.88	3.30
A073524	4.5	0.98	0.86	1.45	2.79	2.04	2.86
A073533	7.5	1.25	1.10	1.81	3.54	2.51	6.61
A073536	10.0	1.37	1.25	2.04	3.93	2.83	9.03

Split pin included

Stainless Steel Shackle No 755 Bow shackle with safety bolt

Material: AISI 316
Finish: Highly polished
Design Factor: 6:1
Documentation: Test certificate and traceable 3.1 certificate supplied upon request.

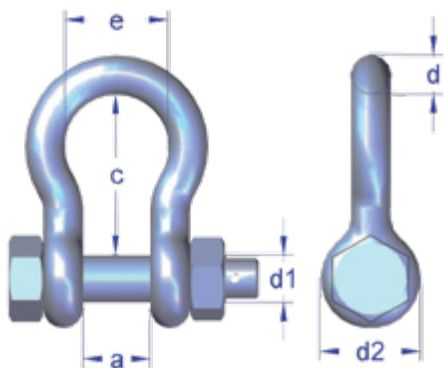


Stock No.	WLL (t) 6:1	Pin d1 (in)	Nominal Size d (in)	Inner Width a (in)	Inner Length c (in)	Bow Width e (in)	Eye Outer d2 (in)	Weight (lb)
A075510	0.6	0.39	0.39	0.78	1.57	1.06	0.78	0.44
A075512	0.9	0.47	0.47	0.98	1.85	1.45	1.02	0.66
A075516	1.5	0.62	0.51	0.98	1.85	1.29	1.33	0.88
A075520	2.5	0.78	0.62	1.10	2.36	1.65	1.57	1.76
A075522	3.0	0.86	0.74	1.22	2.79	2.00	1.88	2.86
A075524	4.5	0.98	0.86	1.45	3.30	2.28	2.04	3.74
A075533	7.5	1.25	1.10	1.81	4.25	2.91	2.51	7.49
A075536	10.0	1.37	1.25	2.04	4.68	3.26	2.83	11.4

Split pin included

Stainless Steel Shackle No 732 Dee shackle with countersunk pin

Material: AISI 316
Finish: Highly polished
Design Factor: 6:1
Documentation: Test certificate supplied upon request.

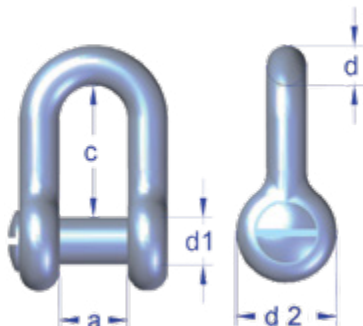

Stock No.	WLL (t) 6:1	Pin d1 (in)	Nominal Size d (in)	Inner Width a (in)	Inner Length c (in)	Eye Outer d2 (in)	Weight (lb)
A073216	2.0	0.63	0.51	0.94	2.04	1.33	0.66
A073220	3.0	0.79	0.62	1.10	2.55	1.57	1.32
A073222	3.0	0.87	0.74	1.22	2.36	1.88	3.08