


S-4320 Replacement Latch Kit



- Heavy duty stamped latch interlocks with the hook tip.
- High cycle, long life spring.
- Can be made into a "Positive Locking" Hook when proper cotter pin is utilized.
- Latch kits shipped unassembled and individually packaged with instructions.
- Meets the intent of OSHA Rule 1926.1431(g) and 1926.1501(g)(when secured with the bolt, nut and pin) for lifting personnel.

IMPORTANT: The new S-4320 Latch Kit will not fit the old style 319, 320 and 322 hooks.

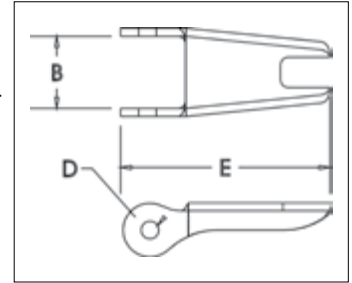


APPLICATION AND WARNING INFORMATION
SECTION 17

4

S-4320 Replacement Latch Kit for 319N, 320N, 322N, 339N, 1327 and 1339 Hooks

Hook Size (t)			Hook ID Code	Stock No.	Weight Each (kg)	Dimensions (mm)		
Carbon	Alloy	Bronze				B	D	E
3/4	1	.5	D	1096325	.01	12.7	3.80	36.6
1	1-1/2	.6	F	1096374	.02	13.7	4.30	39.6
1-1/2	2	1	G	1096421	.02	16.0	4.30	42.2
2	3	1.4	H	1096468	.03	16.8	4.30	48.5
3	5	2	I	1096515	.05	21.1	5.10	58.5
5	7	3.5	J	1096562	.07	26.4	5.10	73.2
7-1/2	11	5	K	1096609	.13	31.8	6.85	90.5
10	15	6.5	L	1096657	.15	34.3	6.85	97.0
15	22	10	N	1096704	.38	42.2	9.90	132

Example of Hook ID Placement Location



Raise your world podcast

A new podcast for lifting professionals