


G-429

Fist Grip® Clip
3/16" - 5/8"



3/16" - 5/8"

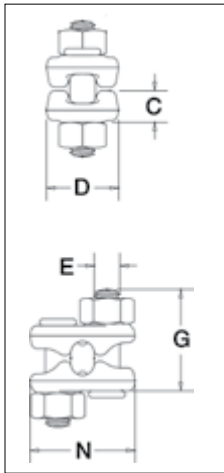

- Entire clip is galvanized to resist corrosive and rusting action.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 3/16" through 7/8" sizes, and 90% for sizes 1" through 1-1/2".
- Bolts are an integral part of the saddle. Nuts can be installed in such a way as to enable the operator to swing the wrench in a full arc for fast installation.
- All sizes have forged steel saddles.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements, including fatigue life, impact properties, and material traceability not addressed by ASME B30.26.
- Assembled with standard heavy hex nuts.

G-429 Fist Grip® Clips

Rope Size		Stock No.	Std. Package Qty.	Weight Per 100 (lb)	Dimensions (in)					
(in)*	(mm)				C	D	E	G	N	
3/16 - 1/4	5-7	1010471	100	23	.40	.94	.38	1.41	1.44	
5/16	8	1010499	100	28	.47	1.06	.38	1.50	1.54	
3/8	10	1010514	50	40	.51	1.06	.44	1.84	1.78	
7/16 - 1/2	11-13	1010532	50	62	.59	1.25	.50	2.21	2.15	
9/16 - 5/8	14-16	1010550	50	103	.72	1.50	.63	2.72	2.57	
3/4	18-20	1010578	25	175	.86	1.81	.75	2.94	2.67	
7/8	22	1010596	25	225	.97	2.12	.75	3.31	2.86	
1	24-26	1010612	10	300	1.13	2.25	.75	3.72	3.06	
1-1/8	28-30	1010630	10	400	1.28	2.38	.88	4.22	3.44	
1-1/4	32-34	1010658	10	400	1.34	2.50	.88	4.25	3.56	
1-3/8 - 1-1/2	36-40	1010676	Bulk	700	1.56	3.00	1.00	5.56	4.12	


* Sizes through 5/8" incorporate new style design.

G-429

Fist Grip® Clip
3/4" - 1-1/2"



3/4" - 1-1/2"

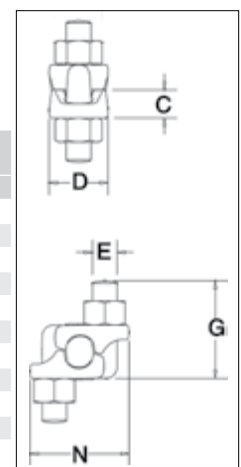


7

APPLICATION AND WARNING INFORMATION
SECTION 17

G-460

Soft Eye
Bundle Clip



(For use without Thimble)

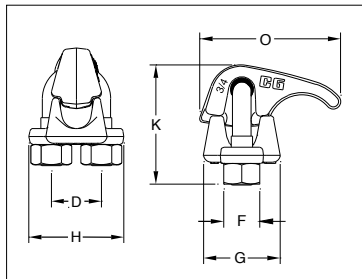

- Forged bases and bundle clip adapters.
- All bundle clips are individually bagged or tagged with proper application instructions and warning information.
- Bundle Clip Adapter for Soft Eye (G4460) and for Thimble Eye (G4461) kits available.
- Meets or exceeds all requirements of ASME B30.26 including manufacturing ID and size requirements. Importantly, these wire rope bundle clips meet material traceability not addressed by ASME B30.26.

G-461

Thimble
Eye Bundle Clip

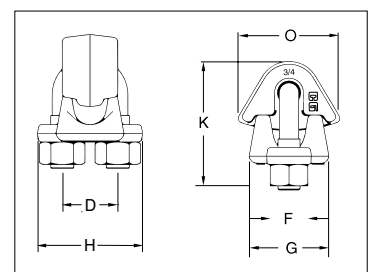

G-460 Soft Eye / G-461 Thimble Eye Bundle Clip

Rope Size		Bundle Clip Style	Stock No.	Dimensions (in)						Weight each (lb)
(in)	(mm)			D	F	G	H	K	O	
3/4	18-20	G460	1010509	1.50	1.06	2.25	2.84	3.50	4.13	2.5
3/4	18-20	G461	1010619	1.50	1.06	2.25	2.84	3.50	2.85	2.5