


G-335



- Forged steel - Quenched & Tempered.
- Integral rivets join the two halves.
- After making connections, rivets must be peened.
- All sizes have countersunk rivet holes.
- Meets or exceeds the performance requirements of Federal Specifications RR-C-27IG, Type II, except for those provisions required of the contractor.
- Not suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.

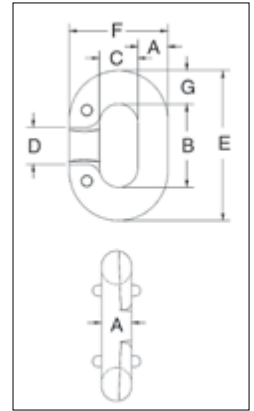


G-335 “Missing Link”® Replacement Links



Chain Size (in)	Stock No.	Working Load Limit (t)	Links Per Box	Weight Per 100 (kg)	Dimensions (mm)						
					A	B	C	D	E	F	G
*7	1013110	.60	10	2.83	7.10	22.4	11.2	11.2	38.1	25.4	7.85
10	1013156	1.25	10	9.07	10.4	28.7	14.2	14.2	52.5	35.1	11.9
11	1013174	1.65	10	12.5	11.9	32.5	15.0	15.0	59.5	38.9	13.5
13	1013192	2.15	10	17.0	13.5	37.3	16.8	16.8	67.5	43.7	15.0
16	1013236	3.30	10	32.9	16.8	46.0	19.8	20.6	84.0	53.0	19.1
19	1013254	4.65	10	55.5	19.8	54.0	23.9	26.9	98.5	63.5	22.4
22	1013272	5.45	Bulk	79.5	23.1	63.5	28.7	28.7	114	74.5	25.4
† 26	1013290	7.00	Bulk	113	26.2	70.0	31.8	31.8	127	84.0	28.7

4:1 Design Factor. *Rivets Only - No interlocking lugs. †Has reinforced rivet holes.

SLING IDENTIFICATION TAG KITS

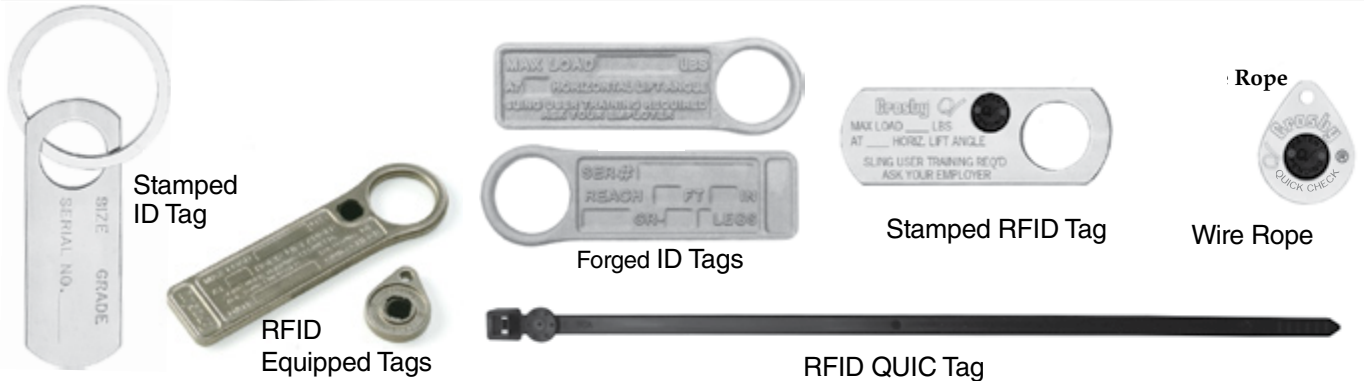

Stamped ID Tags

- Stamped ID Tags
- Octagonal metal sling tag.
- Pre-stamped - easy to add sling length, Working Load
- Limit, name, etc.
- Front side is shown - reverse is blank.
- Available with or without welded attached ring.
- Attaching ring size is 5mm x 50mm.
- Available completely blank for wire rope sling applications.
- Gold painted.

ID Tag Stock No.	Carton Qty.	Weight Per Carton (kg)
115244	50	10.55

ID Tags

- Heavy Duty tags.
- 33 mm diameter ring opening (will fit 6mm - 16mm A-1337).
- Chain tags meet requirements of ASME B30.9 for Sling Identification.
- Raised edge and recessed pads to protect lettering.
- Raised lettering for quick reference.

Operating Frequency: 13.5MHz

Stock No.	Style	Material Type	RFID Equipped	Tag Size (mm)	Weight Each (kg)
115369	Chain	Cast Stainless Steel	Yes	160 x 42	.21
115350	Wire Rope	Cast Stainless Steel	Yes	43 x 33.3	.03
115217	Chain	Forged Steel	No	146 x 48	.18
115353	Chain	Stamped Zinc Plated Steel	Yes	5-3/4 x 1-5/8	.29
115355	Wire Rope	Stamped Zinc Plated Steel	Yes	1-11/16 x 1-5/16	.04
1224692	Zip Tie	High Crystalline Polyamide	Yes	193.675	1.4